
DRB-IR-1224


Flush IR Button

- Brushed Stainless Steel Plate
- IR Button
- Flush mount
- COM-N/O - N/C
- 12~24VDC Operation



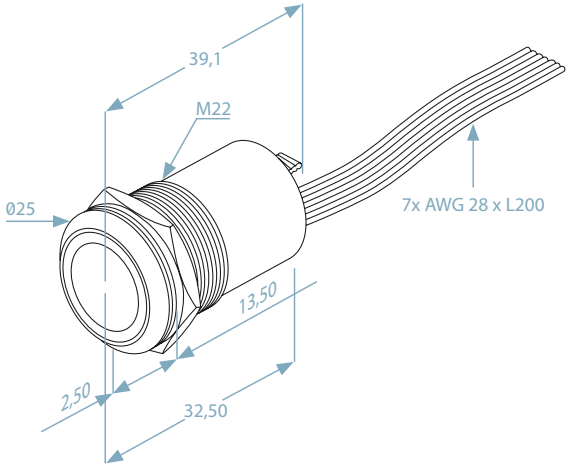


SETTINGS

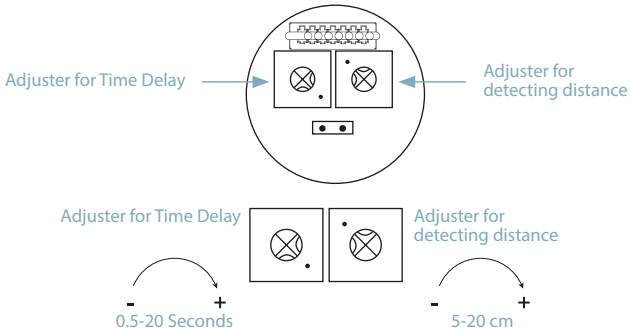

Toggle function: In the end of Clockwise position
Starting Point: from 'metal point'

INT/EXT MODE

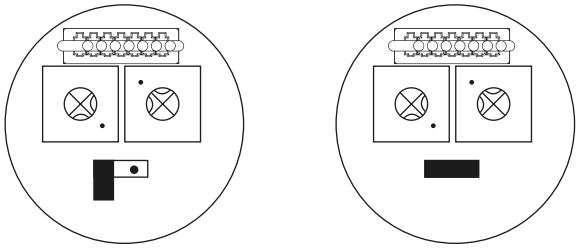


INT MODE

INT: Factory setting, with Jumper open
LEDs will be controlled by IR button

EXT MODE

EXT: with Jumper closed
LEDs will be controlled by system

CABLES



Red cable: 12-24VDC
Black cable: 0VDC
Yellow: Green LED controlled in EXT
White: Red LED controlled in EXT mode

Green: N.O
Blue: COM
Purple: N.C
} Change-over Contact