




ARCHITECTURAL BRACKETS

RGL SAFETY RANGE


MAGNETIC LOCK

Fire tested range of maglocks and brackets from a market leader in access control.

FIRE TESTED to
BSEN1634-1:2014 & BS476:Part22:1987
(30, 60, 90 & 120 min timber door-sets)

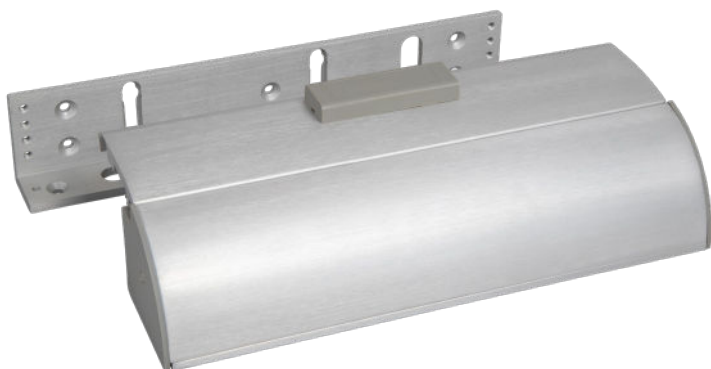


BK600-F-L/AB

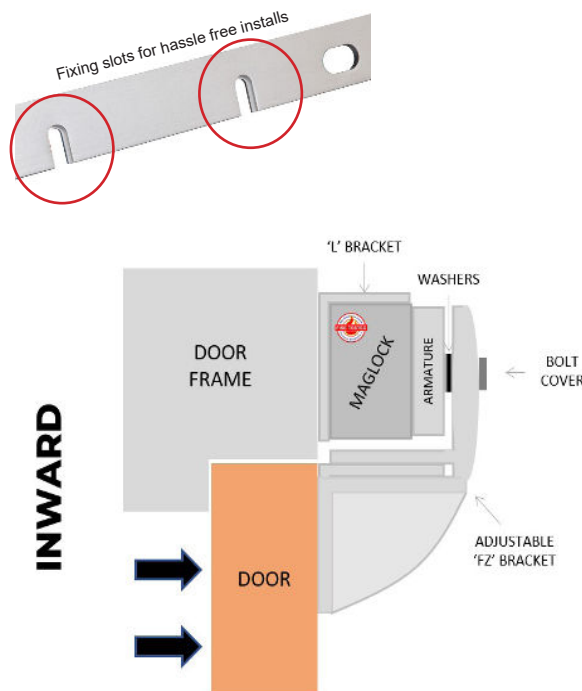

SPECIFICATION

BK600-F-L/AB
 • Specially designed bracket slots that allows for a simple one person installation of maglocks
 • Fully adjustable brackets
 • Suitable for all RGL Slimline Maglocks - inc: ML600 / ML600-M / ML600-MDS



DIMENSIONS

BK600-F-L/AB
 • 250x47x30 (mm) L Bracket (LxWxD)
 • 250x50x55 (mm) Z Bracket (LxWxD) x2
 1.18kg Boxed

FEATURES

BK600-F-L/AB
 • Fire rated (30, 60, 90 & 120 min timber door set)
 • L bracket for use on outward opening doors
 • ZL bracket for use on inward opening doors
 • Anodised aluminium finish

If you are looking for alternative options, then please view the following bracket:

Other bracket options:

- BK600ZL (ZL Bracket)
- GD600ZL (Glass Door ZL)
- AB600CL (Architectural L)
- ADJ600-L (Highly adjustable L)
- AH600 (Required for Fire Doors)
- BK600U (Glass door bracket)

INWARD
OUTWARD

CONTENTS

BK600-F-L/AB
 • L Bracket (600lb)
 • 2 x ZL Brackets
 • 2 x Fixing kits
 • End caps

OTHER PRODUCTS

EBNT/TF-1



120ISM-1



BK600-F-L/AB



DU-CB/PTE

