




GREEN DOME BUTTON

EXIT BUTTONS

Market leading green dome button, that is both hard wearing and cost effective. Suitable for use in applications up to 30V.



EBGBWC02/PTE

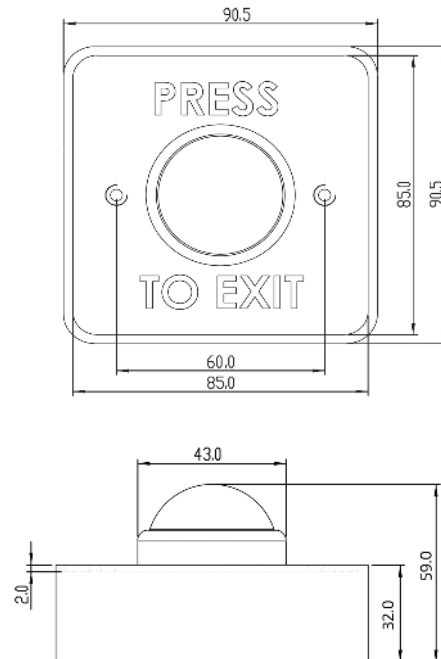

SPECIFICATION

- EBGBWC02
- Contacts: Double Pole N/O - N/C
 - Output: 4Amp contact @ 30V AC/DC
 - Wear resistant legend
 - Security screws (allen key type)
 - Internal or External use
 - Button rated IP66 ingress protection
 - Silver contacts
 - Operating temperature -20° to +60°c
 - Operating travel: 2mm
 - Contact resistance: 10m OHM (Max)
 - Operating life (mechanical): 1,000,000

FEATURES

- EBGBWC02
- All plastic large green dome button
 - Momentary operation / contact
 - High impact plastic back box
 - Can be surface or flush fitting
 - Easy clean surface
 - Ideal for general / sensitive areas
 - Screw footprint for flush fitting onto standard back box
 - Distance between fixing holes 60mm
 - Anti rotational mounting

OTHER PRODUCTS

EBGBWC02/DR



EXTR02



ML600



DU-GB/PTE



DIMENSIONS

- EBGBWC02
- 85H x 85W x 32D (mm)
 - 248g Boxed
 - 200g Unboxed

CONTENTS

- EBGBWC02
- Green Dome Exit Button
 - Stainless Steel Plate (2mm)
 - 2 Security Screws
 - Allen Key
 - Surface Box



Manufactured by a BSIA Member