



ANSI ELECTRIC STRIKE

ANSI STRIKE



AS900



AS900M

SPECIFICATION

- AS900 / AS900M
- Ansi Style Electric Strike
 - Comes with Short and Long Faceplate
 - Short Plate 124mm
 - Long Plate 201mm
 - Use with access and door entry systems
 - Holding force: 1500lb / 680kg
 - 12VDC / 24VDC Selectable
 - Current:
 - 12V 280mA
 - 24V 140mA

- AS900M
- Monitored (NO/COM/NC Contacts)

FEATURES

- AS900 / AS900M
- Suitable for metal / timber applications
 - Fail Safe (Power to Lock)
 - Fail Secure (Power to Open)
 - Selected by adjustment at rear of unit
 - Stainless Steel Plate (3mm Thick)
 - Bull nose corners
 - Unbranded faceplates
- Additional Products:
- EL225 - Extension Lips (22.5mm)
 - Can be doubled up for wider requirements

OTHER PRODUCTS

EL225



120ISM-1



DIMENSIONS

- AS900 / AS900M
- 124x32x43 (mm) Short Plate
 - 201x32x43 (mm) Long Plate
 - 514g (Boxed)
 - 314g (Unboxed)

CONTENTS

- AS900 / AS900M
- Ansi Strike (with short plate fitted)
 - Diode
 - 2 x Brackets (metal fixings)
 - 4 x Screws
 - Long Plate

EBNT/TF-5



EDR-2N





Manufactured by a BSIA Member



ANSI ELECTRIC STRIKE

ANSI STRIKE

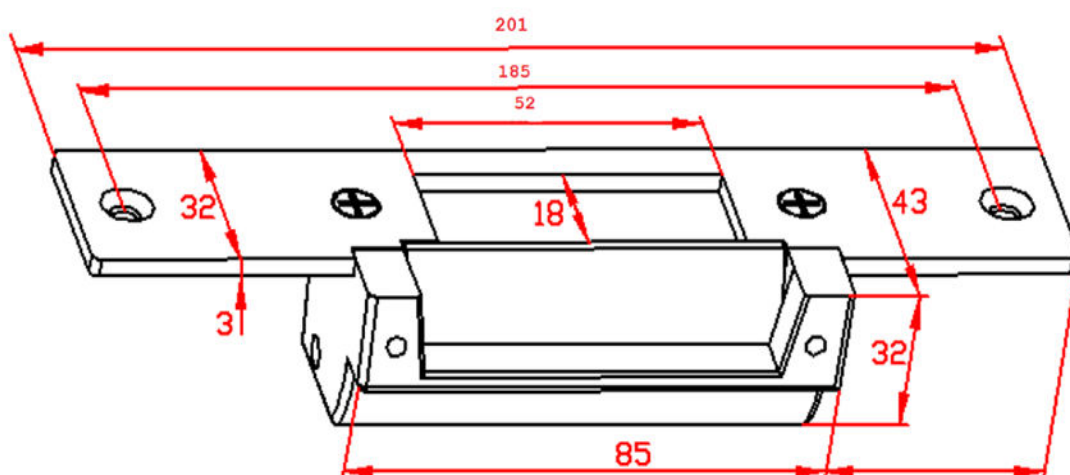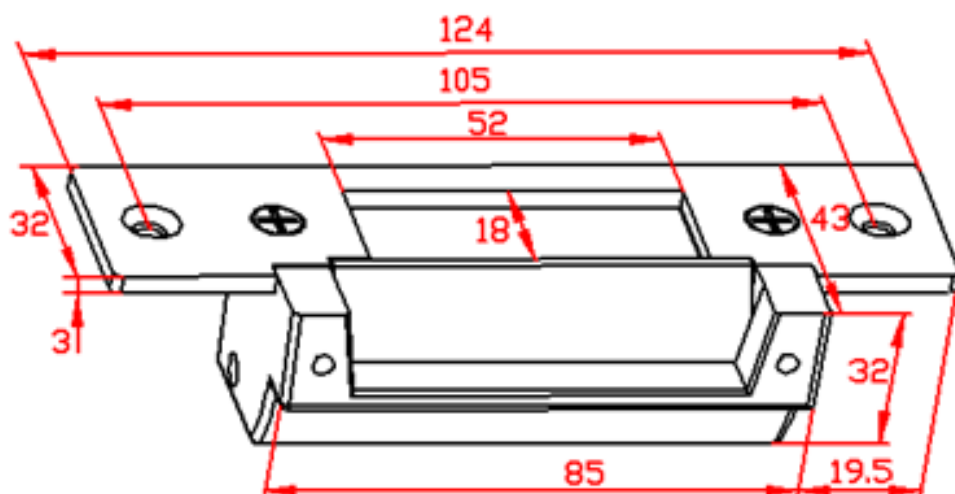

ACCESSORIES



EL225

CONTENTS

EL225 (Sold separately)
• 22.5mm