




DOOR INTERLOCK MODULE

RGL has a broad range of accessories that complement our access control range.

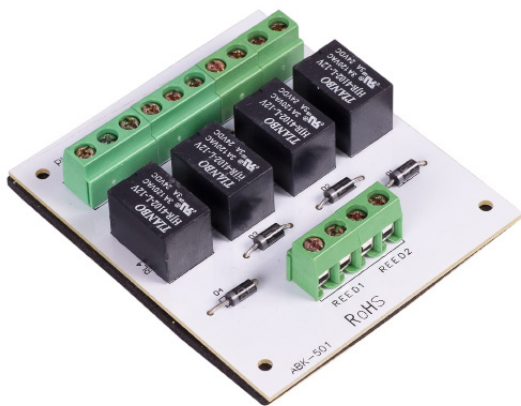

DLIM

SPECIFICATION	FEATURES	OTHER PRODUCTS
DLIM • Two seperate inputs/outputs • Lock outputs are voltage free contacts 5@24V • Requires 12V supply • Relay contacts rated: 3A @ 125VAC or 12VDC • Input voltage: 10-15VDC • Operating temperature: -20 to +70°C • Operating humidity: 0-85 / non-condensing	DLIM • Seperate outputs lock door 1 and 2 • Seperate push to exit inputs door 1 and 2 • To control two doors for interlocking • Requires 1 door to be closed in order for the second door to open	EBSS02/PTE 
DIMENSIONS	CONTENTS	RL02 
DLIM • 70x60 (mm) • 44g (Unboxed)	DLIM	ML600 
		DU-SS/PTE 