




CALL POINT - KEY SWITCH

KEY SWITCHES

An expanded range of key switches that complement our market leading range of access control solutions.



KS-CP

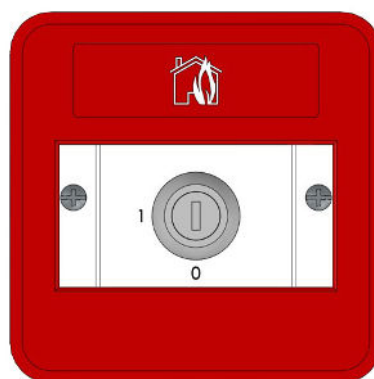

SPECIFICATION

KS-CP

- Latching on/off operation
- Key removal in both positions
- Keyed alike
- Supplied with 2 x keys (A126)
- Voltage free contacts
- Contact Rating: 4A 125VAC & 2A 250VAC
- Contact Rating: 2A 12/24VDC
- Operating Temp: -20 to +55C
- Rated IP54 ingress protection
- Etched legend (0 - 1)
- Security screws

KS-CP-S

- Single Pole - Normally Open/Normally Closed

KS-CP-D

- Double Pole / Double Throw (NO/NC)

DIMENSIONS

KS-CP

- 90x90x55/45 (mm) (HxWxD)
- 260g (Boxed)
- 212g (Unboxed)

FEATURES

KS-CP

- Emergency Door Release design
- Easy to operate
- Use for secure override
- Easy clean surface
- Footprint for mounting onto flush back box

ALTERNATIVES

- KS-EDR-S (Single Pole EDR Key Switch)
- KS-EDR-D (Double Pole EDR Key Switch)
- KS-1 (Latching Operation)
- KS-2 (Momentary Operation)
- KS-3 (3 Position Key Switch)
- JMB/KS-1 (Latching Key Switch in Jamb Box)
- JMB/KS-3 (3 Position Key Switch in Jamb Box)
- WP-KS-1 or 2 (Weatherproof Key Switch)
- EXT/AP/KS-1, 2 or 3 (Architrave Extrusions KS)

CONTENTS

KS-CP

- Key Switch
- Plastic Plate (2mm)
- 2 x Keys (A126)
- 2 Security Screws
- Allen Key
- Shrouded Surface Box

OTHER PRODUCTS

WP-KS-1



EXT/AP/KS-1



JMB/KS-1



KS-EDR-D



Manufactured by a BSIA Member