




SOLENOID BOLT

DROP BOLT



SB-200LS

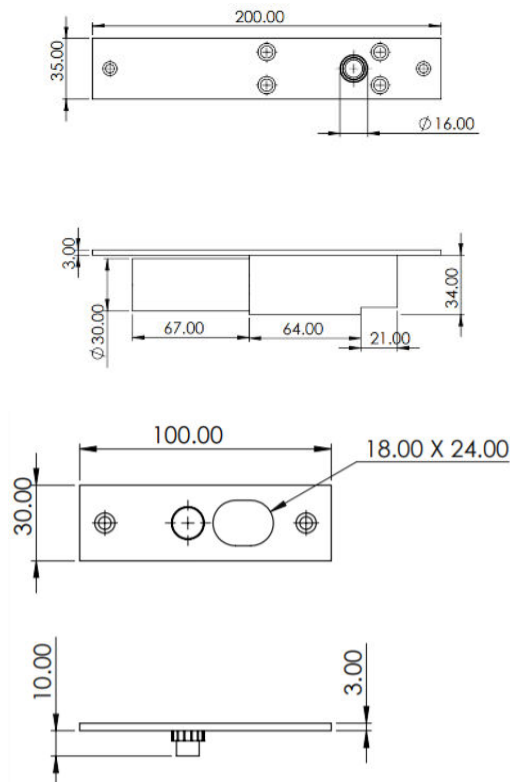

SPECIFICATION

- SB-200LS
- Operating voltage: 12VDC
 - Standby current: 250mA
 - Operating current: 650mA
 - Power to lock
 - Holding force 1300lb / 600kg

FEATURES

- SB-200LS
- Fail-safe operation
 - Delay timer (0/3/6/9) seconds
 - Locking by detector plate
 - Monitored output for door status (NO pair)
 - Suitable for wooden doors
 - Concealed when fitted flush

OTHER PRODUCTS

DS-DUAL



IEPS/PTE



DIMENSIONS

- SB200-LS
- 200x35x38 (mm)
 - 752g (Boxed)
 - 566g (Unboxed)

CONTENTS

- SB200-LS
- Solenoid Bolt
 - Strike Plate
 - Screws

ML600



DU-GB/PTE



Manufactured by a BSIA Member