





VOLTAGE REDUCTION MODULE

ACCESSORIES

RGL has a broad range of accessories that complement our access control range.

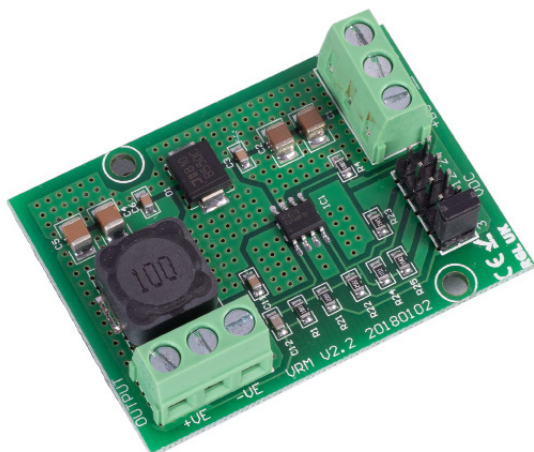

VRM2

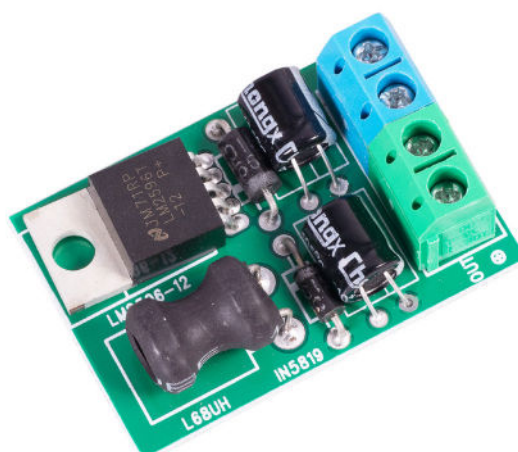

VRM24-12

SPECIFICATION

- VRM2
- Input 6-32VDC
 - Output current: 1.5A maximum (1A continuous)
 - Output voltage: 3, 6, 9, 12, 24 VDC

A step down DC-DC convertor that takes an input at a higher voltage and converts it into a lower voltage. The input voltage is selected by moving the included jumper to the required voltage.

- VRM24-12
- Voltage reducer module - 24VDC to 12VDC
 - Input and output terminals
 - Max current 1AMP @ 12VDC
 - Supplied with adhesive pad

DIMENSIONS

- VRM2 - 53.5x38.6x12.2 (mm) - 25g (Unboxed)
VRM24-12 - 40x25 (mm) - 10g (Unboxed)

FEATURES

- VRM2
- Perfect for jobs where your equipment has different power requirements.
 - Can take any input from 6 to 32V and reduce it to 3, 6, 9, 12 or 24 (as long as the output is a step down from the input)

CONTENTS

- VRM2
VRM24-12

OTHER PRODUCTS

FMS/SURF



KPX1000



ML600



DU-CB/PTE



Manufactured by a BSIA Member