
10143

Electric Release

- Operating voltage 12Vdc
- Stainless Steel
- Fail-Secure *(Power to Unlock)*
- ANSI style release *(Budget)*

STAINLESS STEEL



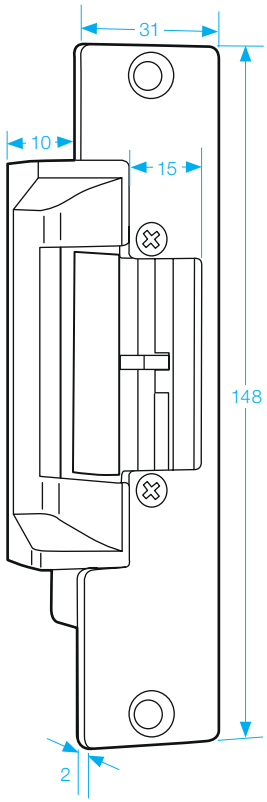

SPECIFICATION

- Voltage tolerance: ±10%.
- Current draw: 200mA *(at temperature 20°C).*
- Operating temperature: -10~45°C *(14 to 131°F).*
- Lock's surface temperature: Current temperature ±20% *(when power is on).*
- Bolt status output indicates bolt locked or unlocked status. *(SPDT rated 3A at 30Vdc).*
- Humidity: 0~95% non-condensing.
- Tested to 5000,000 cycles
- Horizontal or vertical installation.
- Weight: 1.2kg *(approx).*

All dimensions in mm