FR-A10010

Unmonitored Standard Magnet

UK FIRE TESTED
BS EN1634:1
FD30 & FD60 DOORS


- Operating voltage 12~24Vdc *(Selectable)*
- Aluminium housing
- Holding force up to 1200lbs *(544Kg)*
- Electro-less nickel plated armature


BS EN1634:1



OPTIONS



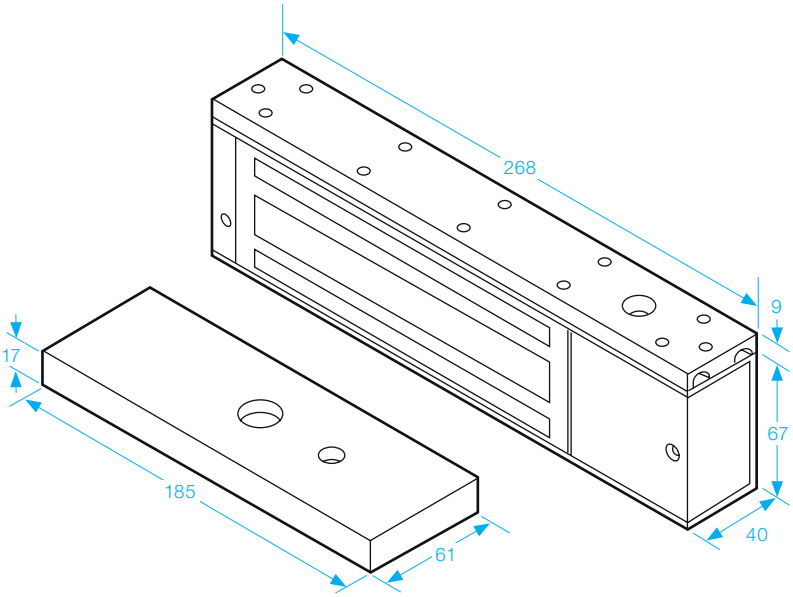

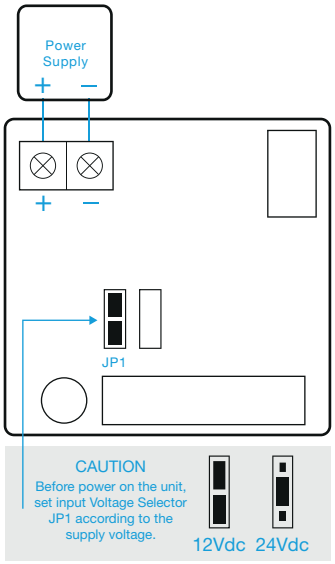

SPECIFICATION

- Voltage tolerance: ±10%.
- Current draw: 420mA at 12Vdc, 210mA at 24Vdc *(at temperature 20°C).*
- Operating temperature: -10~55°C *(14 to 131°F).*
- Lock's surface temperature: Current temperature ±20% *(when power is on).*
- Humidity: 0~95% non-condensing.
- Aluminium housing, nickel plated armature.
- Weight: 4.71kg *(approx).*

All dimensions in mm