FR-U10004

Unmonitored Double Mini Magnet

BS EN1634:1


- FD30 + FD60 Rated
- Operating voltage 12~24Vdc *(Selectable)*
- Aluminium housing
- Safety bolts fitted
- Holding force up to 2 x 600lbs *(272Kg)*
- Electro-less nickel plated armature
- Fail-Safe
- 1 Hour UK fire certificate


UK FIRE TESTED BS EN1634:1 FD30 & FD60 DOORS



OPTIONS



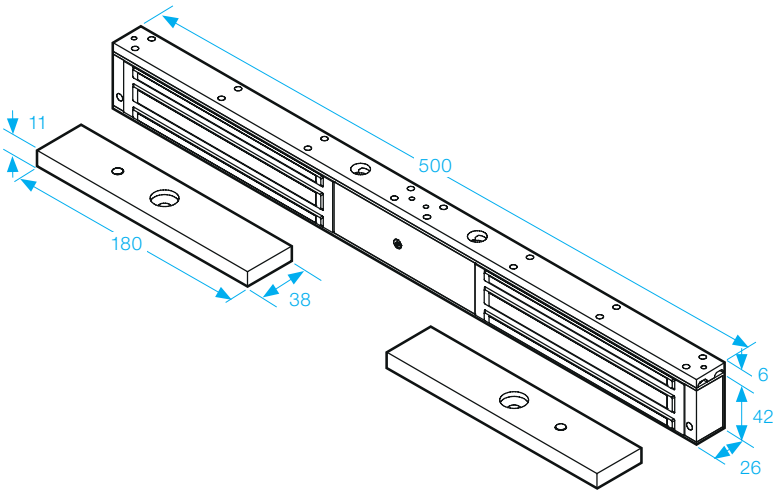

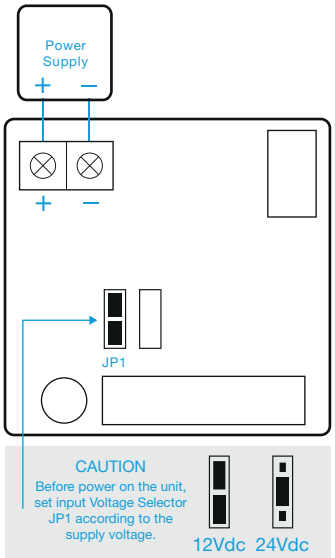

SPECIFICATION

- Voltage tolerance: ±10%.
- Current draw: 480mA at 12Vdc, 240mA at 24Vdc *(at temperature 20°C).*
- Operating temperature: -10~55°C *(14 to 131°F).*
- Lock's surface temperature: Current temperature ±20% *(when power is on).*
- Humidity: 0~95% non-condensing.
- Aluminium housing, nickel plated armature.
- Weight: 3.7kg *(approx).*