FR-U10040DSU

Monitored with Door Status Double Standard Magnet

BS EN1634:1


- FD30 + FD60 Rated
- Operating voltage 12~24Vdc *(Selectable)*
- Aluminium housing
- Safety bolts fitted
- Holding force up to 2 X 1200lbs *(544Kg)*
- Electro-less nickel plated armature
- 1 Hour UK fire certificate
- Door status: An independent contact that works separately from the magnet to show door status not lock status
- Status LED
  ● Red ● Green


UK FIRE TESTED BS EN1634:1 FD30 & FD60 DOORS



OPTIONS



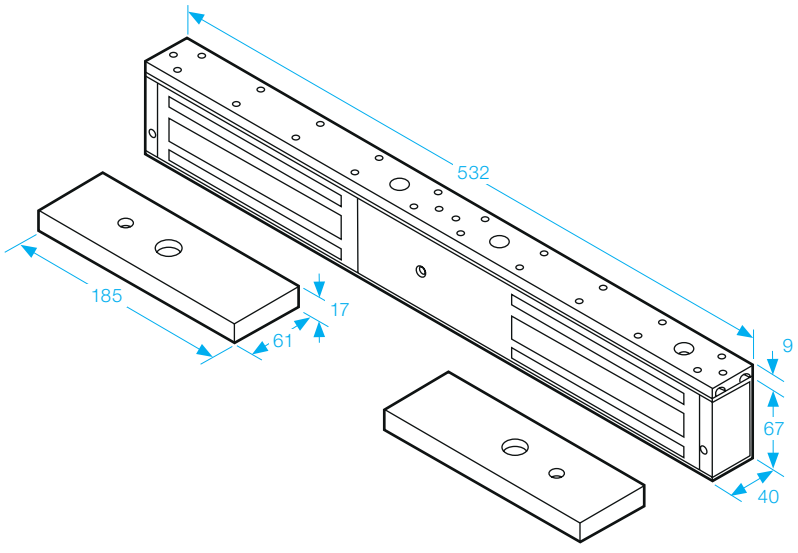

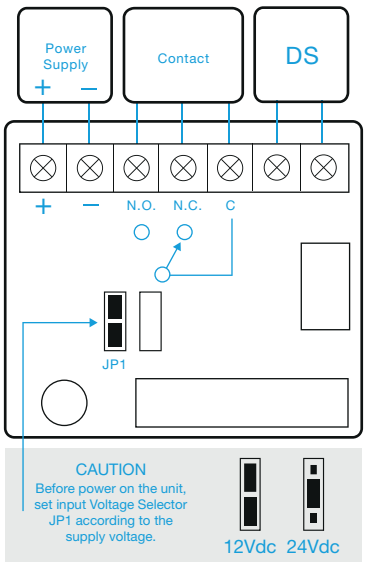

SPECIFICATION

- Voltage tolerance: ±10%.
- Current draw: 420mA at 12Vdc, 210mA at 24Vdc *(at temperature 20°C).*
- Operating temperature: -10~55°C *(14 to 131°F).*
- Lock's surface temperature: Current temperature ±20% *(when power is on).*
- Magnetic bond sensor monitor output remotely monitors the door lock or unlock status. *(N.C. Output-Door opened; N.O. Output-door closed) (SPDT rated 0.25A at 12Vdc).*
- Humidity: 0~95% non-condensing.
- Aluminium housing, nickel plated armature.
- Weight:9.3kg *(approx).*