

# ML350

## Monitored Electric Lock

- Operating voltage 12Vdc  
(24Vdc available to order)
- Stainless Steel
- Fail-safe
- Fire resistant
- 1500lbs holding force
- 500lbs side-load
- Monitored



FIRE  
RESISTANT





STAINLESS  
STEEL

**GEM**®



**500 LBS  
SIDELOAD**

**UK FIRE  
TESTED**

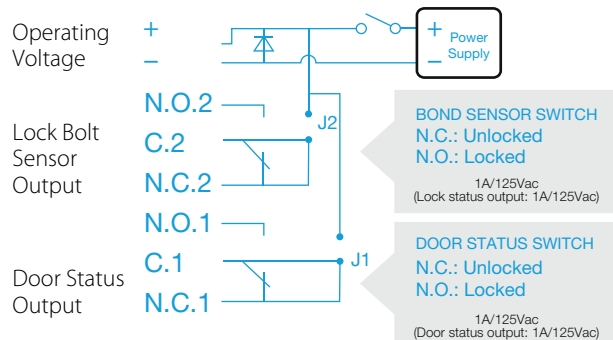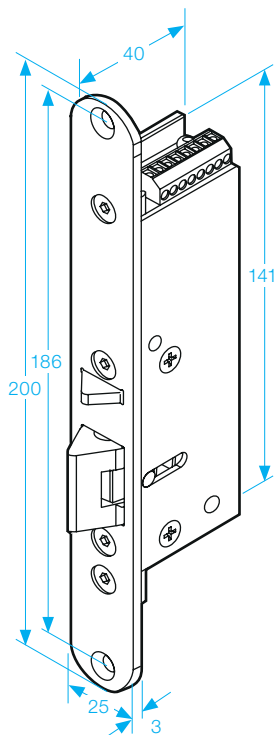

### SPECIFICATION

- Voltage tolerance:  $\pm 10\%$ .
- Current draw: 280mA at 12Vdc, 140mA at 24Vdc (at temperature 20°C).
- Operating temperature: -10~45°C (14 to 131°F).
- Lock's surface temperature: Current temperature  $\pm 20\%$  (when power is on).
- Humidity: 0~95% non-condensing.
- Solenoids tested to 250,000 cycles.
- Weight: 673g (approx).