

PH450M

Monitored Door Handle Magnet

- Operating voltage 12~24Vdc
- Aluminium
- Fail-Safe *(Power to Lock)*
- Holding force up to 600lbs *(272Kg)*



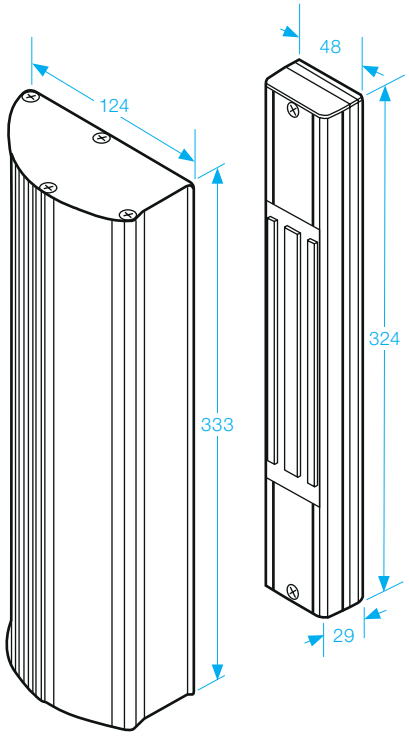

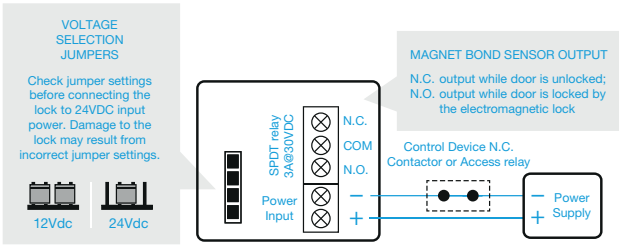

SPECIFICATION

- Voltage tolerance: ±15%.
- Current draw: 500mA at 12Vdc *(at temperature 20°C).*
- Operating temperature: -10~55°C *(14 to 131°F).*
- Lock's surface temperature: Current temperature ±20% *(when power is on).*
- Magnetic bond sensor monitor output remotely monitors the door lock or unlock status. *(N.C. Output-Door opened; N.O. Output-door closed) (SPDT rated 3A at 12Vdc).*
- Humidity: 0~95% non-condensing.
- Special Zinc finish for magnet and armature plate.
- Weight: 2.0kg *(approx).*

All dimensions in mm