


SP-2

Call Point Protector


- Polycarbonate construction
- Surface mount
- Can retro fit over existing device
- Red and green covers supplied
- Built-in 96db sounder
- Supplied with Break Seal

Specification



- Protective cover helps prevent malicious or accidental false fire alarms
- Break seal option for added security
- Available with or without a 96dB integral sounder powered by a 3V lithium battery

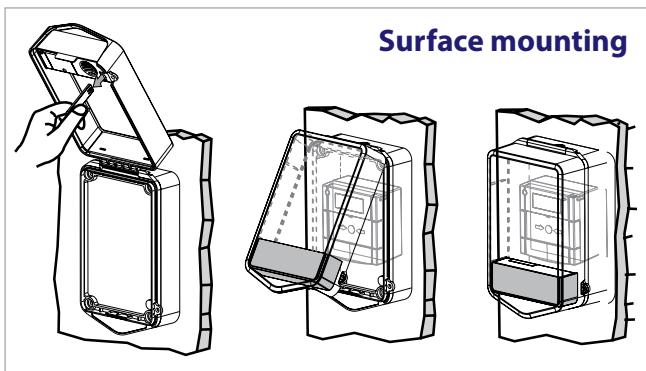

Surface mounting

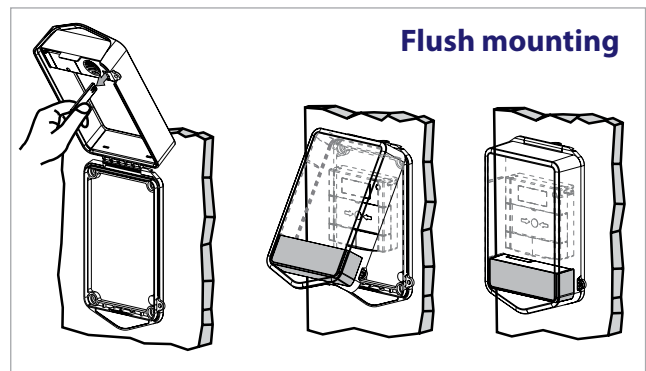

Flush mounting



Standby current: 15µA

Volume

Low: 87dB@1m, 8mA

High: 94dB@1m, 20mA

Battery

Primary Lithium Battery
3v, 1500mAH

