

UGL1200NTBR

External Magnet



- Operating voltage 12~24Vdc
(*Selectable*)
- Stainless Steel housing
- Holding force up to 1200lbs (545Kg)
- Weather resistant IP67
- Sealed electronics



WEATHER
RESISTANT
– IP 67 –



STAINLESS
STEEL

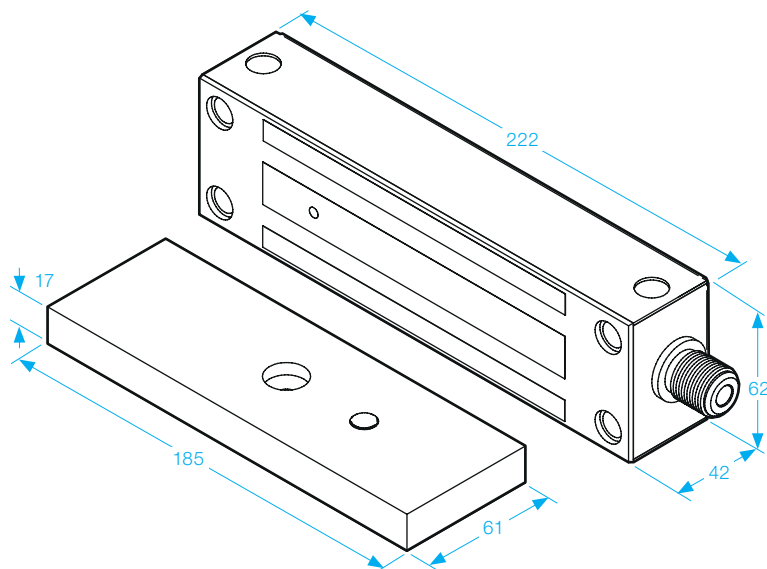

12Vdc



24Vdc

Reed Sensor Contact



CAUTION

Before applying power
set wiring correctly.

SPECIFICATION

- Voltage tolerance: $\pm 10\%$.
- Current draw: 420mA at 12Vdc, 210mA at 24Vdc (at temperature 20°C).
- Operating temperature: -10~55°C (14 to 131°F).
- Lock's surface temperature: Current temperature $\pm 20\%$ (when power is on).
- Humidity: 0~95% non-condensing.
- Weight: 3.7kg (approx).
- Magnetic bond sensor monitor output remotely monitors the door lock or unlock status. (N.C. Output-Door opened; N.O. Output-door closed) (SPDT rated 0.25A at 12Vdc).