

Datasheet

V3SR - Surface monitored maglock, 300kg

Product Description

The V3SR Series are monitored surface maglocks with a holding force of up to 300kg. The V3SR now features a low consumption coil and is fire-rated following the EN1634-1/2 standard for 30 minutes.

It is part of an extensive range of electro-magnetic locks manufactured by CDVI, offering high quality and high performance locking with exceptional features to enhance your installation.

The magnets are delivered with safety "catch" ropes to prevent the magnetic lock from falling, ensuring a side mounting without risk of injury.

Key Features

- Internal surface electro-magnetic lock
- Up to 300kg holding force
- Patented locking technology
- Low consumption
- Monitored version (V3SR) and audible feedback version (V3SRB)
- Visual door status indication with LEDs



Blue
Active Voltage



Green
Open

**PATENTED
BREVETÉ**

We are
**GOING
GREEN**



Certification



DEEE

RoHS

Certification



IP42



IK10



EN1634-1/2 (30 min)




100kg pre-load
(FR regulation NFS 61-937)



-20°C to 60°C

Product Specifications

Material:	Aluminium
Mounting:	Surface
Lock mode:	Fail safe
Holding force:	300kg
Relays:	1
Contacts:	NO/NC
Weight:	1.09kg
Dimensions:	
• Maglock:	254 x 45 x 28 mm
• Armature plate:	185 x 38 x 11mm

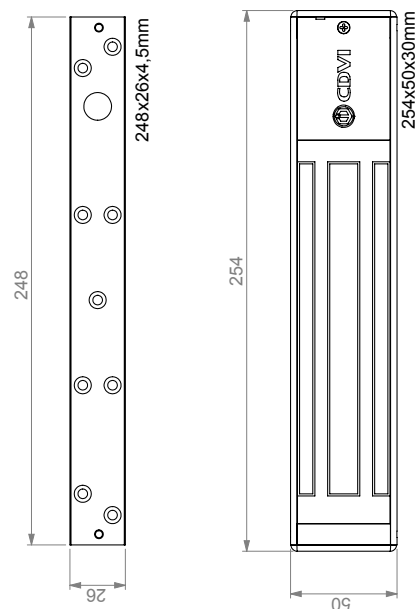

Electrical Specifications

Power input:	12/24Vdc
Consumption:	290mA @ 12Vdc 145mA @ 24Vdc

Accessories



L3L4, Z3Z4Z5

L & Z brackets for internal
300kg maglock



AMA3

Surface armature housing for
300kg magnetic locks



DPM300

Door position monitor for 300kg
surface maglock

Range References

F0526000002	V3SR	Surface 300kg magnetic lock, monitored, fire rated
F0526000016	V3SRB	Surface 300kg magnetic lock, monitored with buzzer