


The ULTRALINE 7400/7401 premium electric strike is designed for installation on aluminium single or double doors. The innovative and compact robust stainless steel split-jaw design maintains the high level of security expected from Adams Rite while enabling release electrically with over 15kg of sideload pressure.

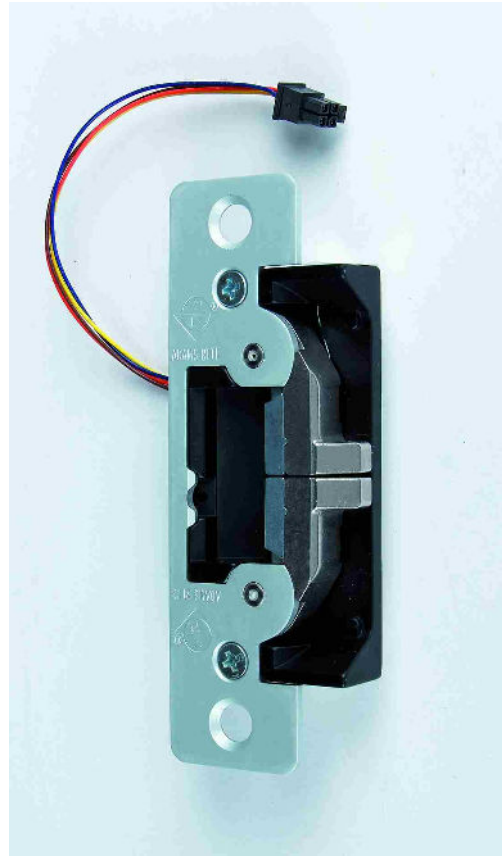

Key Benefits

- Monitoring option
- Opens electrically with over 15kg of sideload pressure
- Compact depth - 27mm overall
- 1080kg holding force
- Single solenoid operates at 12/24V AC/DC
- Field selectable fail safe or fail secure on strike body
- Adjustable jaw
- Low current draw
- Retrofits all previous Adams Rite strikes
- Tested to 500,000 cycles
- Requires half the force to open compared with 7100, aiding compliance with Doc M requirements


7400 Electric Strikes

Premium Electric Strike - 7400/7401 Ultraline

Related Hardware

4710 Deadlatch ~ 4750 Deadlatch ~ Ritekey keypad ~ Push to Exit Button ~ Power Supply Unit

Specification

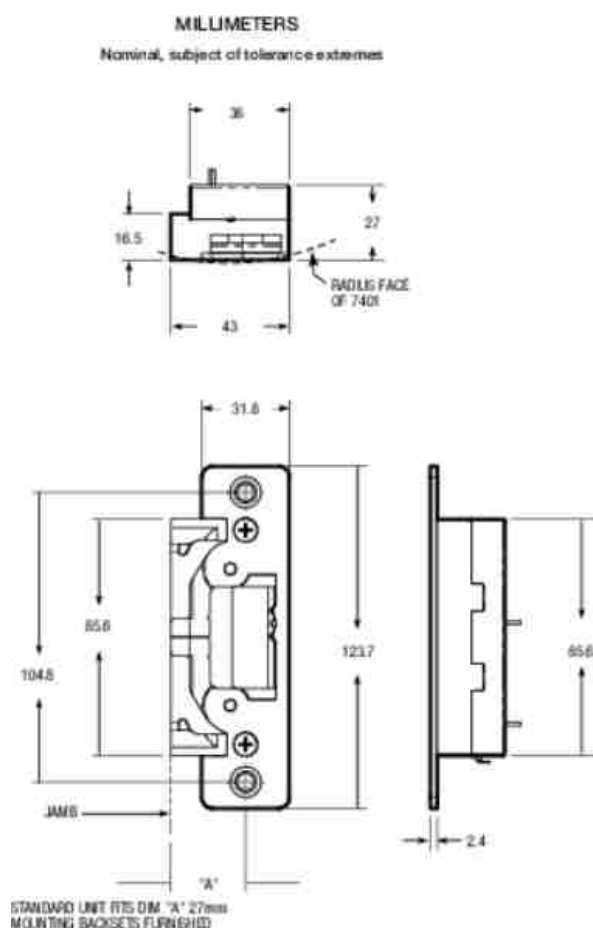

Current Draw:	12v AC=0.16A, 12v DC=0.44A, 24v AC=0.08A, 24v DC=0.23A DC intermittent and continuous units are silent, AC intermittent units 'buzz' on operation
Voltage Tolerance:	+/- 10%
Powered by:	Internal solenoid
Monitoring:	(optional) Double latch and solenoid.
Duty:	Fail safe or fail secure selectable on strike body (supplied in fail secure mode) DC required for fail safe operation
Jaw Strength:	1080kg
Case:	85.6mm x 36mm x 27mm. Zinc aluminium alloy
Mechanism:	Stainless steel
Strike Opening:	36.5mm x 15.9mm (adjustable) x 12.7mm
Door gap:	Minimum 3mm, operational gap 3-5mm
Faceplate:	Flat and radius aluminium: 123.7mm x 31.8mm
Finishes [7400]:	628 Satin Anodised Aluminium (standard) 313 Dark Bronze Anodised Aluminium (option) 335 Black Anodised Aluminium (option) 630 Satin Stainless Steel (option)
Finishes [7401]:	130 to match 628 Satin Anodised Aluminium (standard) 121 to match 313 Dark Bronze Aluminium (option) 119 to match 335 Black Anodised Aluminium (option)
Subcover:	Standard subcover will suit a 44.45mm thick door that closes flush with jamb edge. For extension codes see below.
Standards:	ANSI/BHMA 156.5 Grade 1 UL listed for burglary resistance

7400 Electric Strikes

Premium Electric Strike - 7400/7401 Ultraline

Ordering Information

7400-628	ULTRALINE Electric Strike 12/24V AC/DC Flat SAA
7401-130	ULTRALINE Electric Strike 12/24V AC/DC Radius SAA
7400M628	ULTRALINE Electric Strike 12/24v AC/DC Flat Monitored SAA
7401M130	ULTRALINE Electric Strike 12/24v AC/DC Radius Monitored SAA
7400-313	ULTRALINE ELECTRIC STRIKE 12/24V AC/DC FLAT DARK BRONZE
7400-335	ULTRALINE ELECTRIC STRIKE 12/24V AC/DC FLAT BLACK
7400M313	ULTRALINE ELECTRIC STRIKE 12/24V AC/DC FLAT DOUBLE MON DARK
7400M335	ULTRALINE ELECTRIC STRIKE 12/24V AC/DC FLAT DOUBLE MONITORED
7401-119	ULTRALINE ELECTRIC STRIKE 12/24V AC/DC RADIUS BLACK
7401-121	ULTRALINE ELECTRIC STRIKE 12/24V AC/DC RADIUS DARK BRONZE
7401M119	ULTRALINE ELECTRIC STRIKE 12/24V AC/DC RADIUS DOUBLE MON BLACK

Accessories

LEK7400-50	ULTRALINE 7400 50 SUBCOVER EXTENSION TO SUIT 34.9MM
LEK7400-04	ULTRALINE 7400 04 SUBCOVER EXTENSION TO SUIT 47.8MM
LEK7400-05	ULTRALINE 7400 05 SUBCOVER EXTENSION TO SUIT 50MM
LEK7400-06	ULTRALINE 7400 06 SUBCOVER EXTENSION TO SUIT 54.1MM
LEK7400-07	ULTRALINE 7400 07 SUBCOVER EXTENSION TO SUIT 57.2MM
LEK7400-08	ULTRALINE 7400 08 SUBCOVER EXTENSION TO SUIT 60.5MM
LEK7400-10	ULTRALINE 7400 10 SUBCOVER EXTENSION TO SUIT 66.7MM
WDC7400	ULTRALINE 7400 DOOR COVER