



ARCHITECTURAL BRACKETS FOR SLIMLINE MAGNETS (1200LB)


MAGNETIC LOCK

Fire tested range of maglocks and brackets from a market leader in access control.

FIRE TESTED to
BS EN1634-1:2014 & BS476:Part22:1987
(30, 60, 90 & 120 min timber door-sets)



AB1200CL

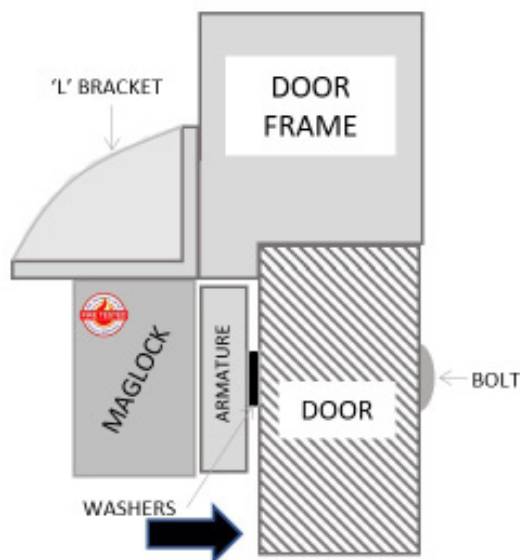

SPECIFICATION	FEATURES	OTHER PRODUCTS
AB1200CL - Architectural L bracket - Anodised aluminium finish - Adjustable to suit different applications - For use with the ML1200 range of products - Cover screws and bolts (no visible fixings) - Covers entire length of maglock - For outward opening doors - Aesthetically improves the appearance of the maglock	AB1200CL - Fire rated (30, 60, 90 & 120 min timber door set) - Provide a more aesthetically pleasing finish to any maglock installation. - Can suit a wide range of locations from modern offices to public buildings Other Brackets/Housings - 1200 Range: - BK1200ZL (ZL bracket) - BK1200-F-L/AB (Architectural F/ZL) - AB1200ZL-DC (Architectural ZL) BK1200L (L Bracket) ADJ1200-L (Highly adjustable L) AH1200 (Required for Fire Doors)	BK1200-FL/AB  AH1200  ML1200  DU-GB/PTE 
DIMENSIONS	CONTENTS	
AB1200CL - L: 270x74x47 (mm) (LxWxH) 400g (Boxed) 318g (Unboxed)	AB1200CL - Architectural L bracket - Fixing kit	
 	 Manufactured by a BSIA Member	