

### MAXIMUM SECURITY

hardened steel bolt, zinc plated with anti-rattle sleeve.

18mm bolt stroke.

7mm zinc plated steel rod with fully threaded length, easily adapted for non-standard door installations.

Lengths available 305mm (12 inch).

"Centre Punch" tip to mark centre of keep.

Die cast zinc alloy body mechanism.

Fixing holes tapped M5.

Fixings included.

Deep finger recess and large lever for ease of operation.

Corners 2.5mm radius for easy matching of cut out.

### FINISHES AVAILABLE

Mill finish - for customers own finish.

Silver - Satin chrome.

Bronze - Powder coat.

White - Powder coat.

Black - Powder coat.

| PRODUCT CODES                  |        |          |          |
|--------------------------------|--------|----------|----------|
| LENGTH                         | FINISH | FLAT     | RADIUS   |
| 305mm<br>(12 inch)             | MILL   | 62.00F12 | 62.00R12 |
|                                | SILVER | 62.01F12 | 62.01R12 |
|                                | BRONZE | 62.02F12 | 62.02R12 |
|                                | WHITE  | 62.01F12 | 62.01R12 |
|                                | BLACK  | 62.02F12 | 62.02R12 |
| SHIPPING WEIGHT 2.52Kg. PER 10 |        |          |          |

Bolt guide by door manufacturer.

### Floor Socket Keep

Sprung loaded, dust resistant, satin chrome finish.

| PRODUCT CODE                   | SOCKET KEEP |
|--------------------------------|-------------|
|                                | 62.035      |
| SHIPPING WEIGHT 2.52Kg. PER 10 |             |



### GUARANTEE

AXIM FLUSH BOLTS ARE GUARANTEED FOR 30 MONTHS FROM THE DATE OF MANUFACTURE AGAINST DEFECT IN MATERIAL AND WORKMANSHIP. THIS GUARANTEE IS VOID IF THE PRODUCT HAS BEEN INCORRECTLY INSTALLED OR DAMAGED IN USE. CLAIMS FOR DAMAGE INCURRED OR WORK DONE THEREON WILL NOT BE ACCEPTED.




AXIM RESERVE THE RIGHT TO UPDATE ITS PRODUCT SPECIFICATIONS WITHOUT PRIOR NOTICE.






### DOOR PREPARATION

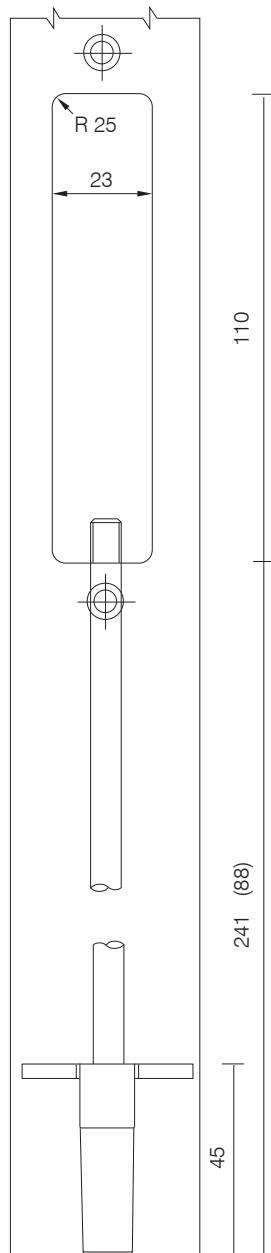

### RADIUSED FACED

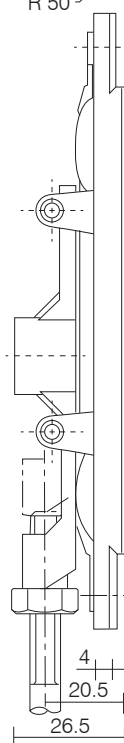

### FLAT FACED

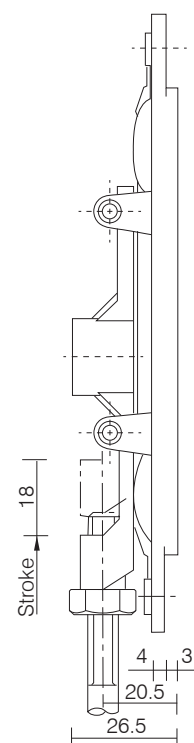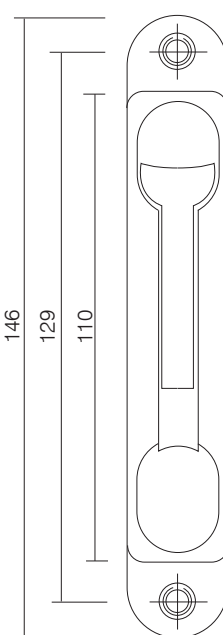

The Parkside Group Ltd


The Willow Centre  
17 Willow Lane, Mitcham, Surrey, CR4 4NX  
Tel: 020-8685 9685 Fax: 020-8646 5096  
Email: axim@parksidegroup.co.uk  
Web Site: www.axim.co.uk

SCALE NTS @A4

DATE JULY 2017

For scaled technical or CAD drawings, please contact AXIM.

Use flush bolt guide FB-62-040  
to support top of flush bolt

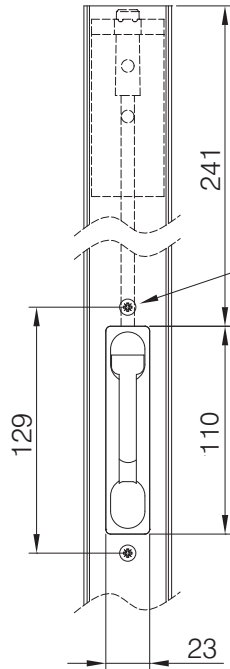

Flush bolt (FB6200) used at  
top and bottom of stile for  
locking purposes

Drill & csk. for M5 typ.

Rout out cutout using  
5mm cutter to achieve  
2.5mm rads in corners

