



ARCHITECTURAL BRACKETS FOR SLIMLINE MAGNETS (600LB)


MAGNETIC LOCK

Fire tested range of maglocks and brackets from a market leader in access control.

FIRE TESTED to
BS EN1634-1:2014 & BS476:Part22:1987
(30, 60, 90 & 120 min timber door-sets)



AB600CL

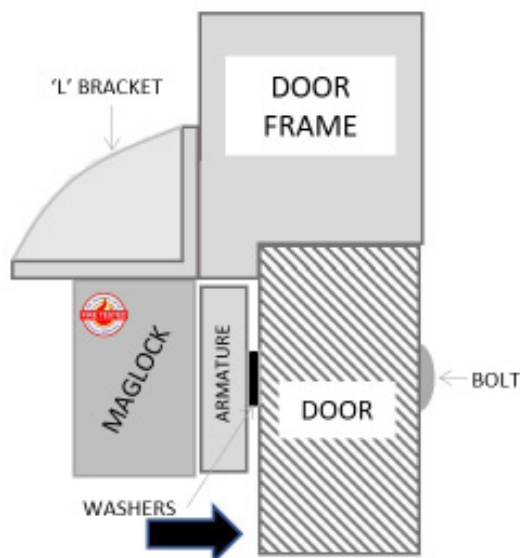

SPECIFICATION	FEATURES	OTHER PRODUCTS
AB600CL - Architectural L bracket - Anodised aluminium finish - Adjustable to suit different applications - For use with the ML600 range of products - Cover screws and bolts (no visible fixings) - Covers entire length of maglock - For outward opening doors - Aesthetically improves the appearance of the maglock	AB600CL - Fire rated (30, 60, 90 & 120 min timber door set) - Provide a more aesthetically pleasing finish to any maglock installation. - Can suit a wide range of locations from modern offices to public buildings Other Brackets/Housings - 600 Range: - BK600ZL (ZL bracket) - BK600-F-L/AB (Architectural F/ZL) - AB600ZL-DC (Architectural ZL) - GD600ZL (Glass Door ZL) BK600L (L Bracket) ADJ600-L (Highly adjustable L) AH600 (Required for Fire Doors) BK600U (Glass door bracket)	BK600-FL/AB  AH600  ML600 
DIMENSIONS	CONTENTS	DU-CB/PTE 
AB600CL - L: 250x50x29 (mm) (LxWxH) 400g (Boxed) 318g (Unboxed)	AB600CL - Architectural L bracket - Fixing kit	
 	 Manufactured by a BSIA Member	