

Datasheet

DOOR AUTOMATION/ EN16005-KIT-U-SR - SR Kit

Product description

Safety is essential to protect people from physical harm if they approach and use automated doors. CDVI offers a complete solution kit, which complies to the EN16005 standard which is considered essential for automated door safety.

Including the DIGIWAY SR (Spring Return), this kit is the answer for door automation in high traffic sites such as front doors or commercial sites.



Key features

- Full door kit
- Single and double door versions available
- Safety sensors, fingerguard and signage included
- Universal arm for inward or outward opening included
- Compatible with CDVI transmitters



Certification



DEEE

RoHS


Certification




-10°C to 55°C

All the information contained within this document (pictures, drawing, features, dimensions, specifications), could be perceptibly different and can be changed without prior notice. - April 2020 - CDVI_EN16005-KIT-U-SR_DS_02_EN_A4_C

Usage

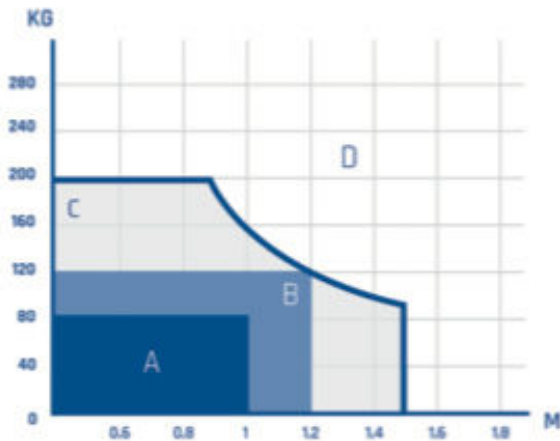

- Zone A:** Very intensive use (600 cycles/day)
Zone B: Intensive use (200-300 cycles/day)
Zone C: Use with reduced speed
Zone D: Do not use

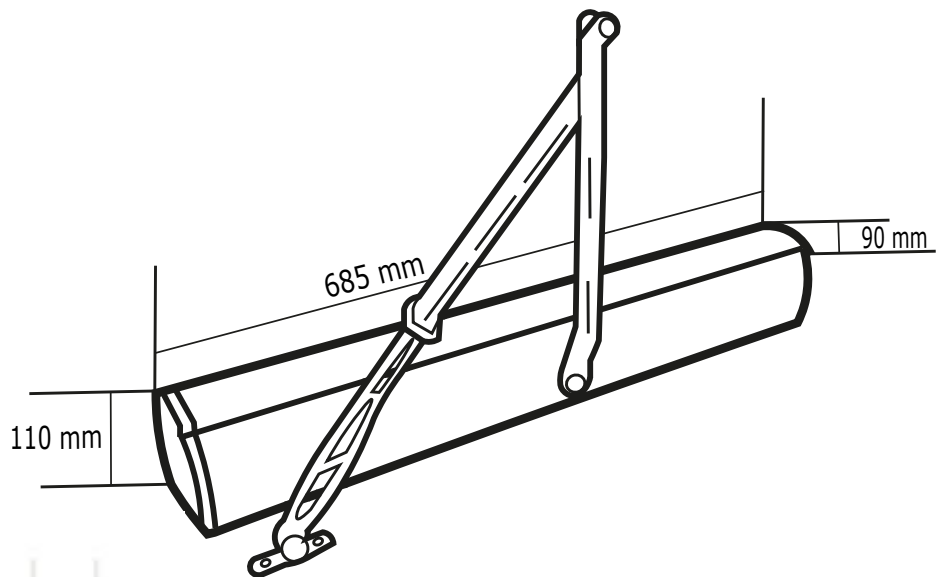

Product information

Transmitter Memory: 50

Transmitter Encoding: Keeloq® Hopping Code

Electrical Specifications

Power supply: 230Vac, 50Hz

Power for auxiliary devices: 12Vdc / 500mA (max)

Power for electrolock: 12Vdc / 1A (max) or 24Vdc / 0.5A (max)

Max current: 100W

Single door kit

- 1 x DWSR102U
- 2 x DWSSS-5M1
- 1 x DWS-FGW or DWS-FGB
- 2 x DWS-KCSIGN
- 2 x DWS-ADSIGN

Double door kit

- 2 x DWSR102U
- 4 x DWSSS-5M1
- 2 x DWS-FGW or DWS-FGB
- 4 x DWS-KCSIGN
- 4 x DWS-ADSIGN
- 1 x DWSPCS