

Datasheet

DOOR AUTOMATION/ EN16005-KIT-U - DWP Kit

Product description

Safety is essential to protect people from physical harm if they approach and use automated doors. CDVI offers a complete solution kit, which complies to the EN16005 standard which is considered essential for automated door safety.

Including the DIGIWAY Plus, this kit is the answer for residential disabled adaptation and care homes.



Key features

- Full door kit
- Single and double door versions available
- Safety sensors, fingerguard and signage included
- Universal arm for inward or outward opening included
- Compatible with CDVI transmitters



Certification




DEEE

RoHS


Certification



-10°C to 55°C

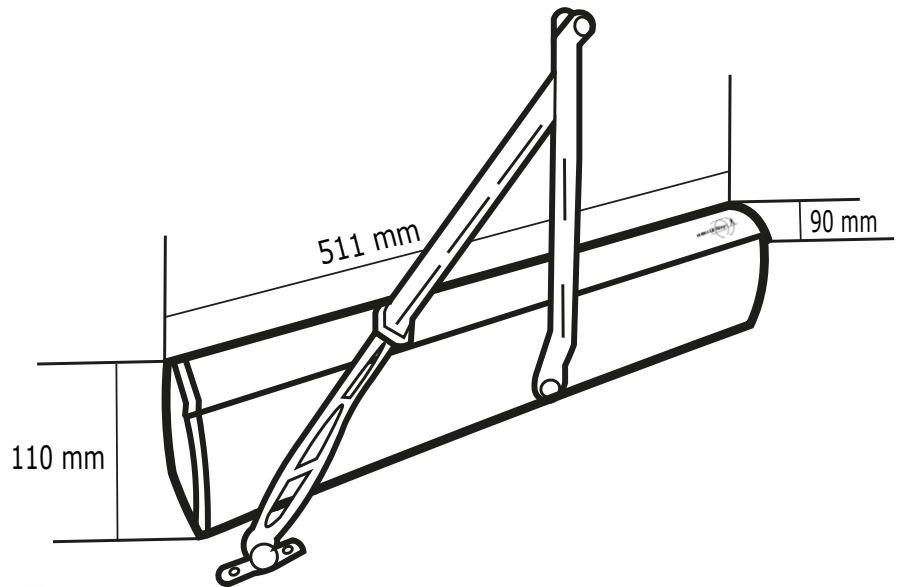

Usage

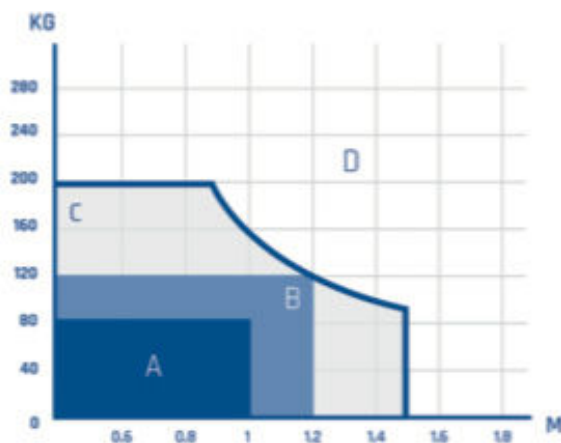

- Zone A:** Very intensive use (600 cycles/day)
Zone B: Intensive use (200-300 cycles/day)
Zone C: Use with reduced speed
Zone D: Do not use

Product information

Transmitter Memory: 50

Transmitter Encoding: Keeloq® Hopping Code

Electrical Specifications

Power supply: 230Vac, 50Hz

Power for auxiliary devices: 12Vdc / 500mA (max)

Power for electrolock: 12Vdc / 1A (max) or 24Vdc / 0.5A (max)

Max current: 100W

Single door kit

- 1 x DWPS102U
- 2 x DWSSS-5M1
- 1 x DWS-FGW or DWS-FGB
- 2 x DWS-KCSIGN
- 2 x DWS-ADSIGN

Double door kit

- 2 x DWPS102U
- 4 x DWSSS-5M1
- 2 x DWS-FGW or DWS-FGB
- 4 x DWS-KCSIGN
- 4 x DWS-ADSIGN
- 1 x DWSPCS