

ABLOY

Package 1ME
Multipoint

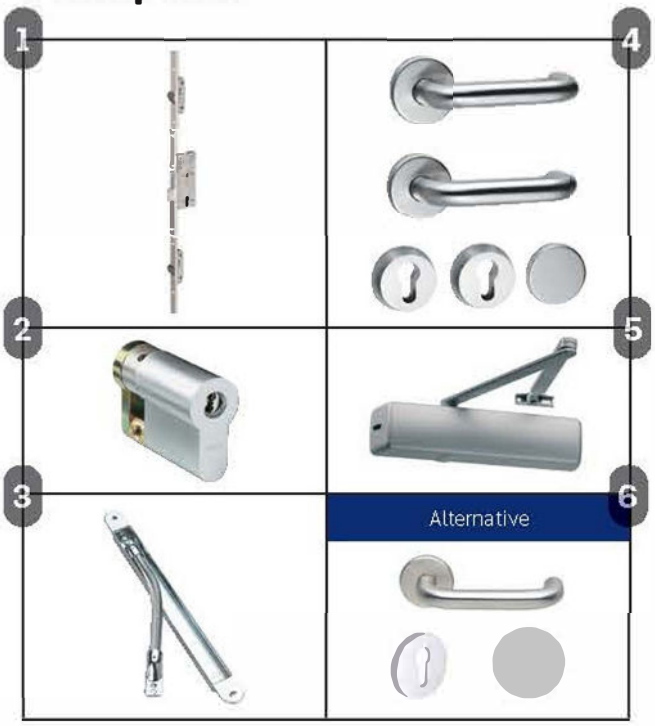

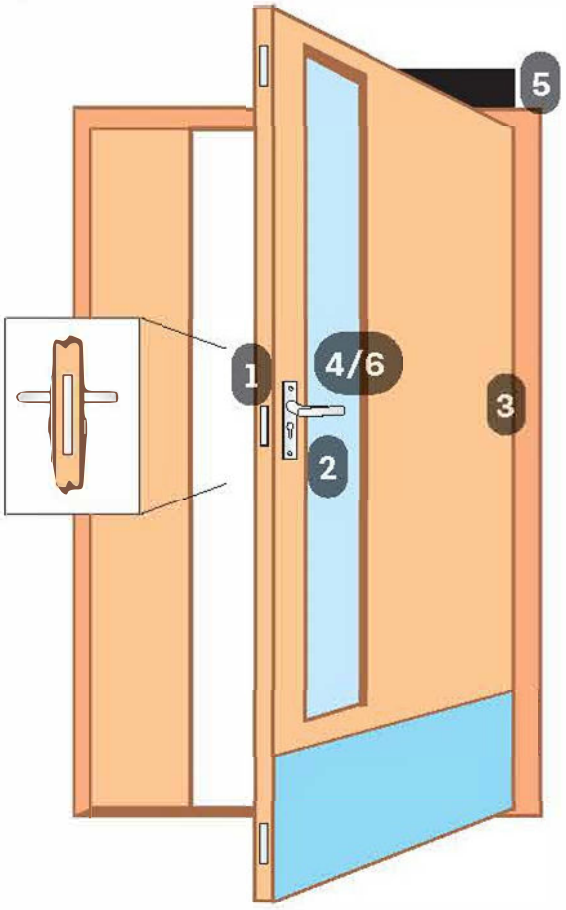

EN179

Standard door
Multipoint – Read in, free egress – complies with EN179

1. EL566 multipoint solenoid lock
2. CY326 single cylinder – DIN Europrofile
3. EA280 concealed door loop
4. 60-0319-SSS handle set
5. DC240 door closer (optional)
6. 3-19/042 PZ+BL-SSS (alternative)

ORDERING CODES

ABLOY-EL566-55-PACK1ME
ABLOY-EL566-60-PACK1ME
ABLOY-EL566-65-PACK1ME

Wood or metal door applications with handle operation, inside handle always operates and the outside handle is controlled and activated on signal from access control system. Key override at all times from outside.

Technical Specification:

Operating voltage: 12 V DC to 24 V DC stabilised (+15%-10%).
Current draw: 12 V DC 350 mA max 24 V DC 250 mA max.
Backsets available: Standard 65 mm, 55 mm, 60 mm.
Monitoring: RQE on inside handle, bolt position, door position, cylinder operation.

Standards:

EN179 when used with correct furniture
EN1634-1
EN61000-6-1
EN1303 (cylinder)
EN14846

