





HIGH SECURITY MAGNETIC LOCK (3000LB / 1400KG)

MAGNETIC LOCK

Range of maglocks and brackets from a market leader in access control.

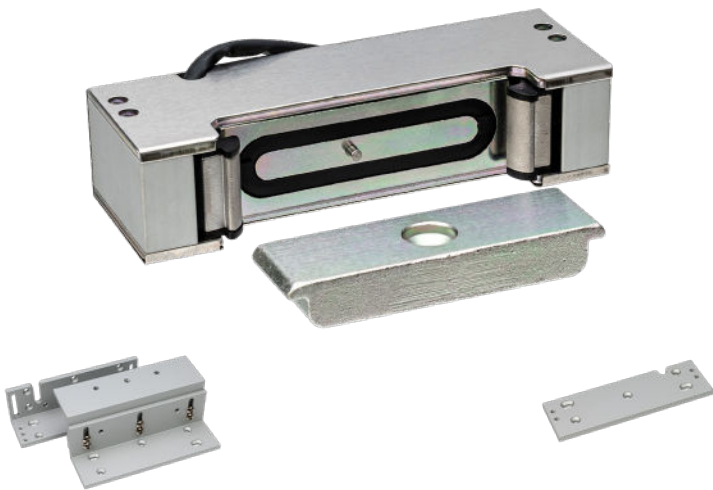

SML-3000

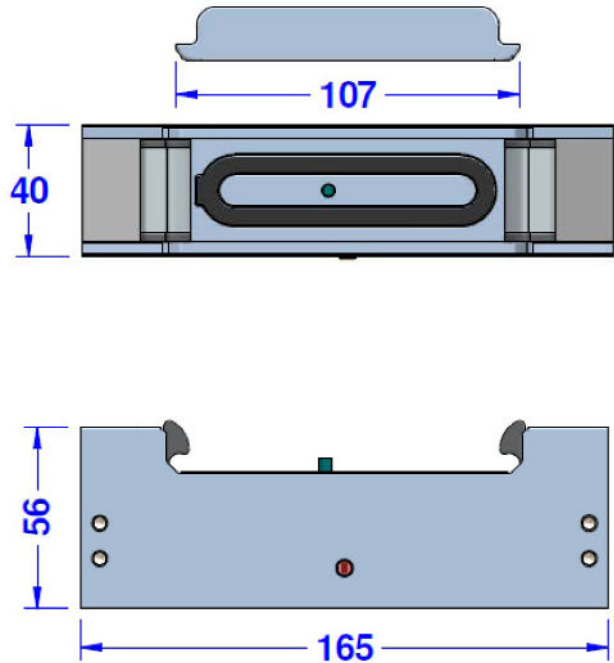

SPECIFICATION

SML-3000

- Automatic dual voltage
- 12/24 VDC @600/300mA
- 1400kg (3000lb) holding force
- Built in surge protection
- Surface mount
- Fail safe operation (power to lock)
- -10° to +50° operating temperature
- 2 spring loaded hardened steel jaws

Suitable for both inward and outward opening doors:

- includes mounting bracket for outward doors
- includes ZL bracket for inward opening

DIMENSIONS

SML-3000

- 165x56x40 (mm) Maglock (LxWxD)
- 107x32x16.5 (mm) Armature (LxWxD)
- 1.88kg Boxed
- 1.72kg Unboxed

FEATURES

SML-3000

- Monitored Maglock
- Time Delay (5 second built in timer)
- Ultra compact design
- No residual magnetism
- Status LED indication
 - RED - Unlocked
 - BLUE - Locked

CONTENTS

SML-3000

- High Security magnet
- Armature plate
- Fixing kit
- Instructions
- Armature fixing template
- MB & ZL bracket

OTHER PRODUCTS

SBK-3000ZL



SBK-3000MB



6ACCESS-I2



EDR-IL-TP



Manufactured by a BSIA Member